



# Order

609 Main Avenue  
Moorhead, MN 56560  
Phone: (218) 233-6104

Order Created: 03/26/2025

Number  
**03265001**

Date  
**03/26/2025**

Page  
**1**

**Sold To:**

Customer # **7012004949**  
DAN & JANA OLSON  
4740 HAMPTON LOOP SOUTH  
MOORHEAD, MN 56560  
Phone: (701) 200-4949

**Ship To:**

DAN & JANA OLSON  
4740 HAMPTON LOOP SOUTH  
RED LEAF  
MOORHEAD, MN 56560  
Phone: (701) 200-4949

janahillestad@hotmail.com

<b>SalesPerson</b> STEVE	<b>PO Number</b> REBATE?? CUST. \$\$	<b>Tax Exempt #</b>	<b>Comment</b> PROFILE QUOTE - INCLUDES DELIVERY & INSTALL - NO INSTALL OF CT, WO, & HOOD
<b>Terms</b> Net 30 Days	<b>Ship Method</b> Delivery		

Model Numbers				
Qty	Model Number	Model Description	Unit Amount	Extended
1	PAD28BYTFS	"36"" Std-Depth\28.0 CuFt\4 Dr French Quad DnD\Internal Dispnr\Autofill\XWF	\$2,999.00	\$2,999.00
1	PTD700RSNSS	PROFILE 30" Width\Dbf Elec w/ RH side-swng Dr\Slf & Stm	\$3,098.00	\$3,098.00
1	PGP9036SLSS	GE Profile™ 36" Stainless Steel Gas Cooktop	\$1,799.00	\$1,799.00
1	UVC9360SLSS	GE 36" Insert\390 CFM\LED Lighting\Convertible	\$799.00	\$799.00
1	SHP78CM5N	BOSCH 800 Pckt Hndl, 5/4 cycles, 42 dBA, Flex 3rd Rck,	\$1,199.00	\$1,199.00
1	GCST16S1WSS	GE COUNTER TOP 1,150W\1.6 CuFt\Turntable\Sensor\Defrost	\$174.00	\$174.00
1	GFW655SPVDS	GE 5.0 cu ft Front Load Washer	\$849.00	\$849.00
	****DOOR SWING??****			
1	GFD65ESPVDS	GE 7.8 cu ft Front Load Dryer	\$849.00	\$849.00
1	GFA28KITN	Stacking Kit	\$69.00	\$69.00
1	DC4-30-5	DRYER CORD 4 WIRE 5FT	\$20.00	\$20.00
1	RDF	MN ROAD IMPROVEMENT & FOOD DELIVERY FEE	\$0.50	\$0.50

Seller is not responsible for delays or lack of product due to causes beyond our control.

Purchaser agrees that Seller shall retain a purchase money security interest in the above merchandise until payment is made in full. There is no FINANCE CHARGE on accounts paid within 30 days of delivery. All accounts not paid within 30 days of delivery a FINANCE CHARGE is computer by a periodic rate of 1.5% per month or a minimum charge of 50 cents which is an Annual Percentage Rate of 18%. The finance charge is computer 30 days after delivery on the unpaid balance and each 30 day period thereafter. Prices quoted by salespersons are for normal situations and do not cover abnormal circumstances.

I/WE HAVE READ AND AGREE TO THE TERMS STATED ABOVE.

By \_\_\_\_\_ Buyers Signature Date \_\_\_\_\_

**Summary**

Sub Total	\$11,855.50
Taxable Sub Total	\$11,855.00
Tax 7.875%	\$933.58
Total	\$12,789.08
Total Payments	
Amount Due	\$12,789.08
Total Payments	\$0.00
<b>Amount Due</b>	<b>\$12,789.08</b>



**GE Profile™ ENERGY STAR® 28.4 Cu. Ft. Quad-Door Refrigerator with Dual-Dispense AutoFill Pitcher and Door in Door**

**Approx Dimensions (HxWxD): 69 7/8 H x 35 5/8 W x 36 3/4 D**

**Model#: PAD28BYTFS**

- Fully Convertible Temperature Zone [▶](#)
- The Most Ice Storage In The Industry\* [▶](#)
- Dual-Dispense AutoFill Pitcher [▶](#)
- Door-in-Door Storage
- LED Light Wall
- Convenient Freezer Organization [▶](#)
- Soft Close Drawers
- Advanced Water Filtration
- Built-In WiFi
- Triple Evaporators
- Filtered Water Capacity
- Monitor Ounces Dispensed
- Dual-Dispense AutoFill Pitcher
- Refills Throughout the Home [▶](#)
- Dimensions

**Warranty Information:**

- Warranty Notes: See written warranty for full details
- Labor Warranty: Limited 1-year entire appliance
- Labor Warranty: Limited 5-year sealed refrigerating system
- Parts Warranty: Limited 1-year entire appliance
- Parts Warranty: Limited 5-year sealed refrigerating system





**GE Profile™ 30" Smart Built-In Convection Double Wall Oven with Right-Hand Side-Swing Doors**

**Approx Dimensions (HxWxD): 53 H x 29 3/4 W x 26 3/4 D**

**Model#: PTD700RSNSS**

- Built-In WiFi, Powered by SmartHQ App [▶](#)
- GE Profile Connect + [▶](#)
- Swing Door
- Precision Cooking Modes [▶](#)
- No Preheat Air Fry [▶](#)
- No Preheat [▶](#)
- Brilliant Touch 7" Display [▶](#)
- True European Convection with Direct Air [▶](#)
- Easy-Glide, Never-Scrub Rack
- Temperature Probe
- Self-Clean with Steam Clean
- Fit Guarantee [▶](#)

**Warranty Information:**

- Labor Warranty: Limited 1-year entire appliance
- Parts Warranty: Limited 1-year entire appliance
- Warranty Notes: See written warranty for full details



## GE Profile™ 36" Built-In Tri-Ring Gas Cooktop with 5 Burners and Included Extra-Large Integrated Griddle

Approx Dimensions (HxWxD): 5 1/2 H x 36 W x 21 D

Model#: PGP9036SLSS

- 18,000-BTU Power Boil Tri-Ring Burner
- More Cooking, Less Cookware
- Maximize Your Cooking Space
- Precise Simmer Burner
- Spend Less Time Cleaning Up
- Dishwasher-Safe Grates
- White LED Backlit Heavy-Duty Knobs [▶](#)
- Control Lock Capability
- MAX Burner System [▶](#)
- Fit Guarantee [▶](#)
- Included Griddle JXGRIDL236

### Warranty Information:

- Parts Warranty: Limited 1-year entire appliance
- Warranty Notes: See written warranty for full details
- Labor Warranty: Limited 1-year entire appliance

ADA  
COMPLIANT





### 36" Smart Designer Custom Insert w/ Dimmable LED Lighting

Approx Dimensions (HxWxD): 11 1/2 H x 34 1/2 W x 19 1/4 D

Model#: UVC9360SLSS

- Adjustable CFM blower
- Triple LED dimmable lighting
- Premium baffle stainless steel filters
- WiFi powered by SmartHQ™ [▶](#)
- Electronic backlit controls
- Electronic backlit controls
- Chef Connect
- Remote control included
- Four-speed fan control
- Heat Sensor [▶](#)

#### Warranty Information:

- Labor Warranty: Limited 1-year entire appliance
- Warranty Notes: See written warranty for full details
- Parts Warranty: Limited 1-year entire appliance

ADA  
COMPLIANT



### GE® 1.6 Cu. Ft. Countertop Microwave Oven

Approx Dimensions (HxWxD): 12 7/8 H x 21 3/4 W x 17 3/4 D

Model#: GCST16S1WSS

- 1.6 cu. ft. capacity
- Sensor cooking controls
- Weight and time defrost
- Turntable
- Two-Step Child Lock
- Instant On controls
- Control lockout
- "Add 30 seconds" button
- Timer on/off

#### Warranty Information:

- Labor Warranty: Limited 1-year entire appliance
- Parts Warranty: Limited 1-year entire appliance
- Warranty Notes: See written warranty for full details



**GE® ENERGY STAR® 5.0 cu. ft. Capacity Smart Front Load Steam Washer with SmartDispense™ UltraFresh Vent System with OdorBlock™ and Sanitize + Allergen**

**Approx Dimensions (HxWxD): 39 3/4 H x 28 W x 32 D**

**Model#: GFW655SPVDS**

- UltraFresh Vent System With OdorBlock™ [↗](#)
- Microban® antimicrobial technology
- SmartDispense™ Technology [↗](#)
- Sanitize + Allergen
- WiFi Powered by SmartHQ™
- Dynamic Balancing Technology (dBT™) [↗](#)
- Reversible Door
- PowerSteam
- Quick Wash Cycle
- Dryer Control™ [↗](#)
- More Water Option
- Large Capacity Washer
- Shallow Depth Washer

**Warranty Information:**

- Parts Warranty: Limited 1-year entire appliance
- Parts Warranty: Limited 10-year motor
- Warranty Notes: See written warranty for full details
- Labor Warranty: Limited 1-year entire appliance



**GE® ENERGY STAR® 7.8 cu. ft. Capacity Smart Front Load Electric Dryer with Steam and Sanitize Cycle**

**Approx Dimensions (HxWxD): 39 3/4 H x 28 W x 32 D**

**Model#: GFD65ESPVDS**

- Powersteam [▶](#)
- WiFi powered by SmartHQ™
- Quick Dry
- Sanitize Cycle
- Reduce Static
- Wrinkle Care
- Damp Alert
- Vent Sensor
- 4 Way Venting

**Warranty Information:**

- Parts Warranty: Limited 1-year entire appliance
- Warranty Notes: See written warranty for full details
- Labor Warranty: Limited 1-year entire appliance



### GE Washer/Dryer Stack Bracket Kit

Approx Dimensions (HxWxD):

Model#: GFA28KITN

- Stacking kit for GE 28" front load washers and dryers
- Ensures proper installation for stacked GE 28" front load laundry



Warranty Information:

# PAD28BYTFS

## GE Profile™ Series ENERGY STAR® 28.4 Cu. Ft. Quad-Door Refrigeration with Dual-Dispense AutoFill Pitcher

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

Overall Dimensions	<b>A</b> Overall Height to top of door (in)	<b>69 7/8</b>
	<b>B</b> Height to top of hinge cover (in)	<b>69 3/4</b>
	<b>C</b> Height to top of case (in)	<b>68 5/8</b>
	<b>D</b> Hinge Cover Depth from Case Flange (in)	<b>6</b>
	<b>E</b> Case Depth without door (in)	<b>29 1/2</b>
	<b>F</b> Case Depth without Door Handle (in)	<b>34 1/4</b>
	<b>G</b> Overall Case Depth with Door Handle (in)	<b>36 3/4</b>
	<b>H</b> Depth with FF Door open 90 deg (in)	<b>48 3/8</b>
	<b>I</b> Case Width (in)	<b>35 5/8</b>
	<b>J</b> Width with door open 90 deg including handle (in)	<b>44 7/8</b>
	<b>K</b> Top endcap of FZ drawer to floor (in)	<b>33 1/5</b>

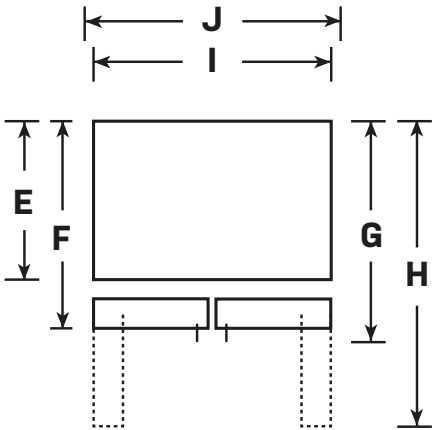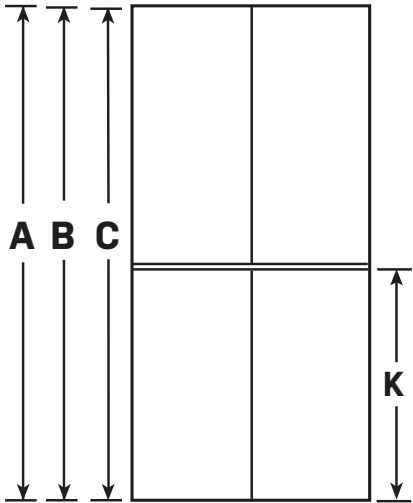

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Listed by  
Underwriters  
Laboratories



Specification Revised 10/24

# PAD28BYTFS

## GE Profile™ Series ENERGY STAR® 28.4 Cu. Ft. Quad-Door Refrigeration with Dual-Dispense AutoFill Pitcher

### FEATURES AND BENEFITS

**Total Capacity** – 28.4 Cu. Ft.

**FF Capacity** – 16.53 Cu. Ft.

**FZ Capacity** – 5.95 Cu. Ft.

**Convertible Zone Capacity** – 5.89 Cu. Ft.

**ADA Compliant** – No

**ENERGY STAR** – Yes

**Full Depth**

**Dual-Dispense AutoFill Pitcher** – Internal

**Icemaker** – Yes

**Water Filtration** – Yes

**Control Type** – Internal 7 Segment LED Display

**Internal Lighting** – LED Light Wall

**Colors Available** – Fingerprint Resistant Stainless

**Case Color** – Dark Gray

**Claims & Certifications** – ENERGY STAR Qualified

**Warranty** – Limited 1-year entire appliance

Limited 5-year sealed refrigerating system

**Model PAD28BYTFS** – Fingerprint Resistant Stainless



# PTD700RSN

## GE Profile™ 30" Smart Built-In Convection Double Wall Oven with Right-Hand Side-Swing Doors

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


**NOTE:** Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200°F (94°C).

**NOTE:** If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 400 lbs (181 kg).

**NOTE:** Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


**ATTENTION INSTALLER:** Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

**IMPORTANT:** Before installing, consult installation instructions packed with product for current dimensional data.

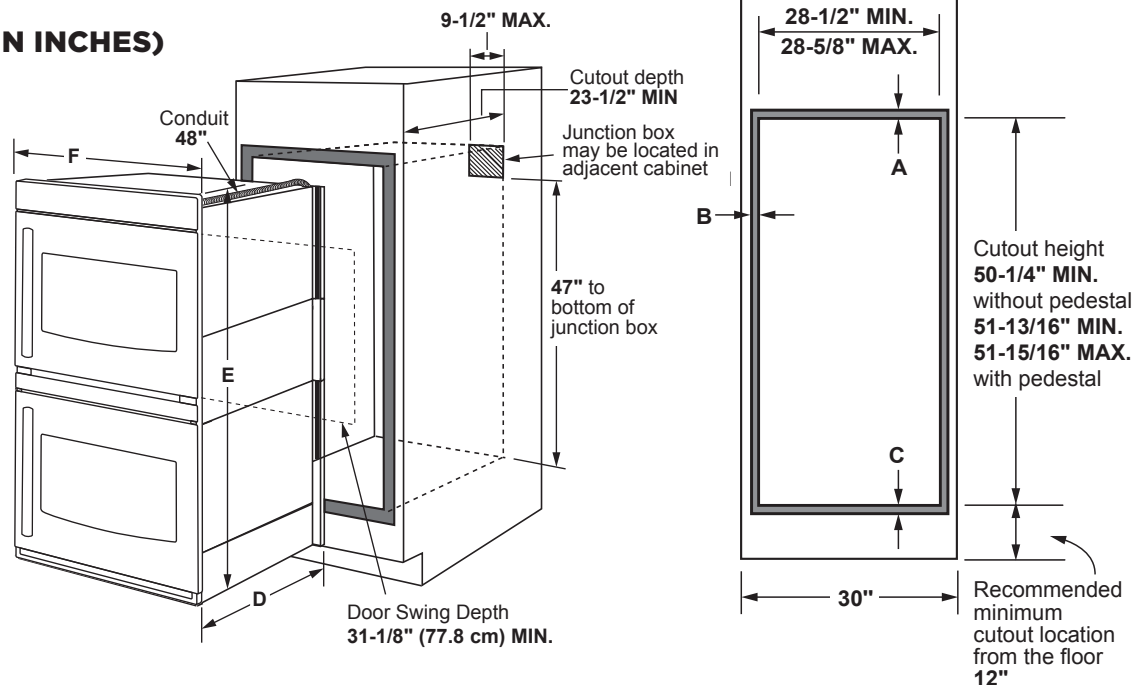

Dimension and installation information are shown in inches.

KW RATING	
240V	9.0
208V	6.8
BREAKER SIZE	
240V	40 Amps
208V	40 Amps

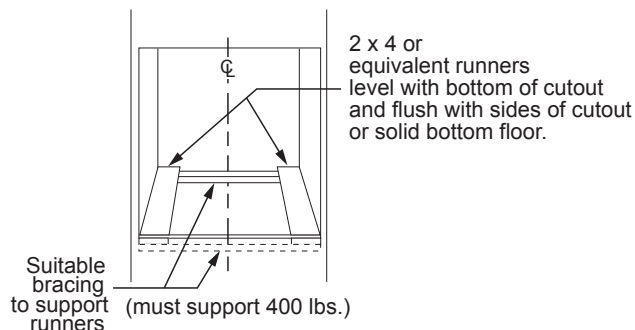

### PTD7000

Cabinet	30"
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	11/16"
C - Overlap of oven at bottom of cutout	1-1/4"
Oven	
D - Install depth	23-1/2"
E - Overall height with trim	53"
F - Overall width	29-3/4"



For answers to your GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Listed by  
Underwriters  
Laboratories



Specification Revised 7/20



# PTD700RSN

## *GE Profile™ 30" Smart Built-In Convection Double Wall Oven with Right-Hand Side-Swing Doors*

### **DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)**

**NOTE:** 30" Double electric wall ovens are approved for installation above 27" and 30" warming drawers.


**IMPORTANT:** Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

**WHEN TO USE THE PEDESTAL RAILS:** When replacing an older GE Appliances 30" double wall oven with a new GE Appliances model. Cutout Height = 51-13/16" to 51-15/16". This is our traditional cutout height.

**WHEN NOT TO USE THE PEDESTAL RAILS:**

When replacing a 30" double wall oven from another manufacturer (ie; Whirlpool) with a new GE Appliances model. Cutout height = 50-1/4". You will need to verify that the existing cutout matches the 50-1/4" dimension.

If the new GE Appliances 30" double wall oven is being installed into new construction (ie; not a replacement), then the recommended installation is to use the pedestal rails.

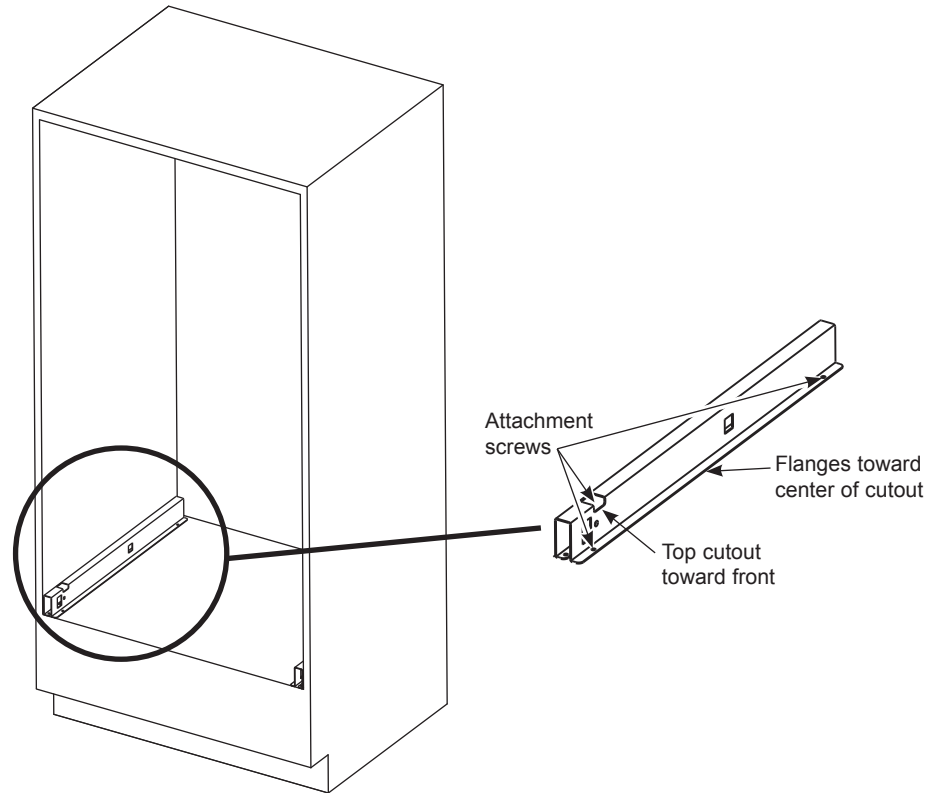

For answers to your GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.

Specification Revised 7/20

# PTD700RSN

## *GE Profile™ 30" Smart Built-In Convection Double Wall Oven with Right-Hand Side-Swing Doors*

### FEATURES AND BENEFITS

**Swing Door** – An innovative door design that opens to the side instead of down, eliminating awkward reaching.

**Precision Cooking Modes\*** – Simplify the cooking process with precision cooking modes that automatically track progress, and make time and temperature adjustments (upper oven).

**No Preheat Air Fry** – Integrated hot air frying technology gives you crispy results in your oven without using oil (upper oven).

**No Preheat** – Eliminate the need for preheating and save time with a variety of precision cooking modes.

**Built-in WiFi** – This smart oven features built-in WiFi so you can control oven functions with the SmartHQ app on your smart device.

**Full-Color Display** – Easily navigate wall oven settings thanks to a 7" touchscreen display.

**True European Convection with Direct Air** – This oven features True European Convection, an advanced convection system that uses a third heating element and reversing fan for the highest level of heat and air circulation.

**Easy-Glide, Never-Scrub Rack** – This smooth-gliding oven rack can be left in the oven during the self-clean cycle so you never have to scrub.


**Temperature Probe** – A precision temperature probe connects to the oven to ensure your food is properly cooked.

**Self-Clean with Steam Clean** – This self-cleaning oven uses optional steam cleaning for light soils to clean the oven cavity with less heat and odor.

**Fit Guarantee** – This oven will fit your existing cut-out, or GE Appliances will help pay for modifications up to \$300.

**Model PTD700RSNSS – Stainless Steel**

\*Available once connected to WiFi.

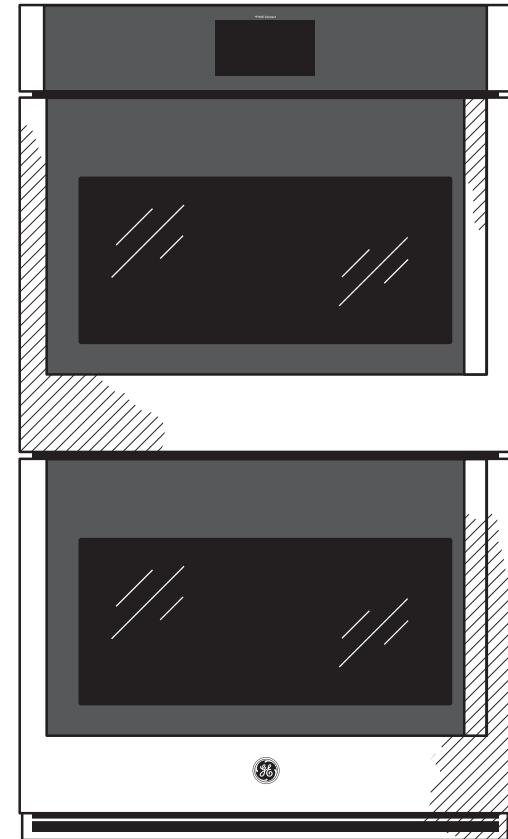

Visit [geappliances.com](http://geappliances.com) for more info.



# PGP9036SL

## GE Profile™ 36" Built-In Tri-Ring Gas Cooktop with 5 Burners and Extra-Large Integrated Griddle

### DIMENSIONS AND INSTALLATION INFORMATION

**AGA REQUIREMENT:** All gas cooktop models require 7/16" free area below cooktop height to combustible material. Requires 18" minimum from countertop to adjacent overhead cabinets.


**NOTE:** If installing with a GE Profile™ Telescopic Downdraft System, consult both cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft.

**ELECTRICAL RATING:** 120V, 60Hz, 5A

#### INSTALLATION WITH SINGLE WALL OVEN INFORMATION:


30" Gas Cooktops are approved for use over select GE 27" and 30" Wall Ovens and Warming Drawers. 30" and 36" Gas cooktops are approved for use over select 30" Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data.

**INSTALLATION INFORMATION:** Before installing, consult installation instructions, packed with product, for current dimensional data.

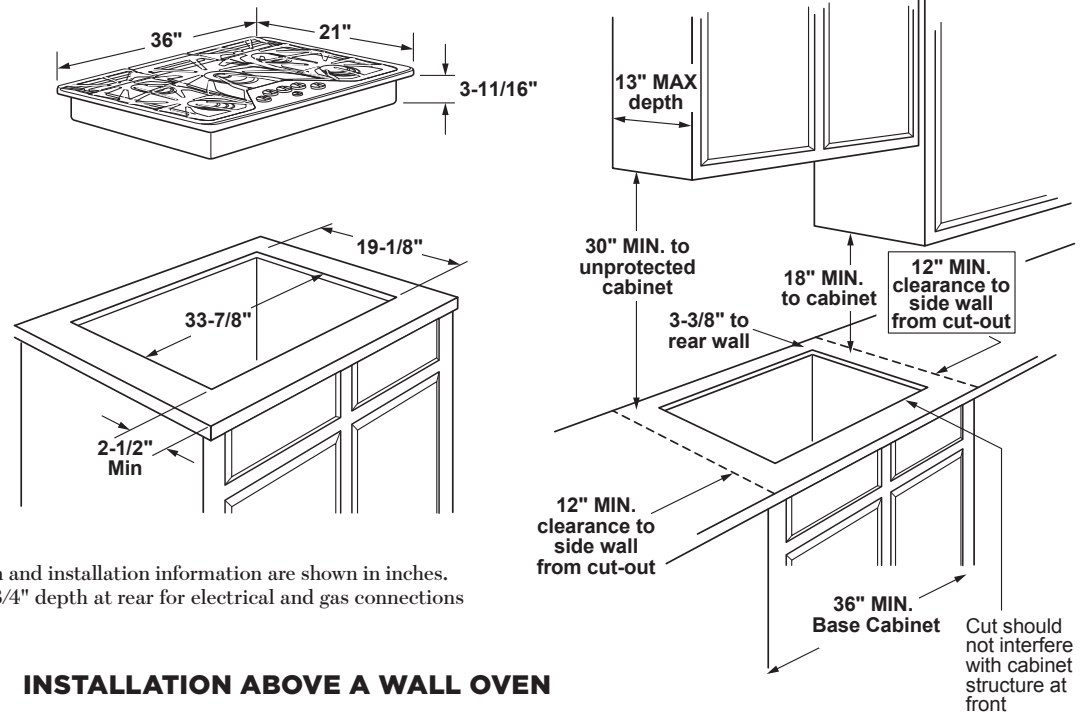

Dimension and installation information are shown in inches.  
\*Allow 5-3/4" depth at rear for electrical and gas connections

#### INSTALLATION ABOVE A WALL OVEN

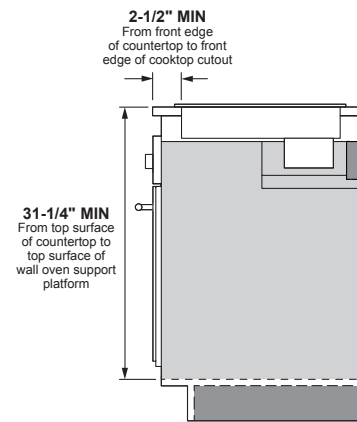

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or  
GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com)  
or call GE Answer Center® Service, 800.626.2000.



# PGP9036SL

## *GE Profile™ 36" Built-In Tri-Ring Gas Cooktop with 5 Burners and Extra-Large Integrated Griddle*

### FEATURES AND BENEFITS

18,000-BTU Power Boil Tri-Ring Burner

More cooking, less cookware

Maximize your cooking space

Precision simmer burner

Spend less time cleaning up

Dishwasher-safe grates


White LED backlit heavy-duty knobs

Control lock capability

MAX burner system

Fit Guarantee

Model PGP9036SLSS – Stainless steel

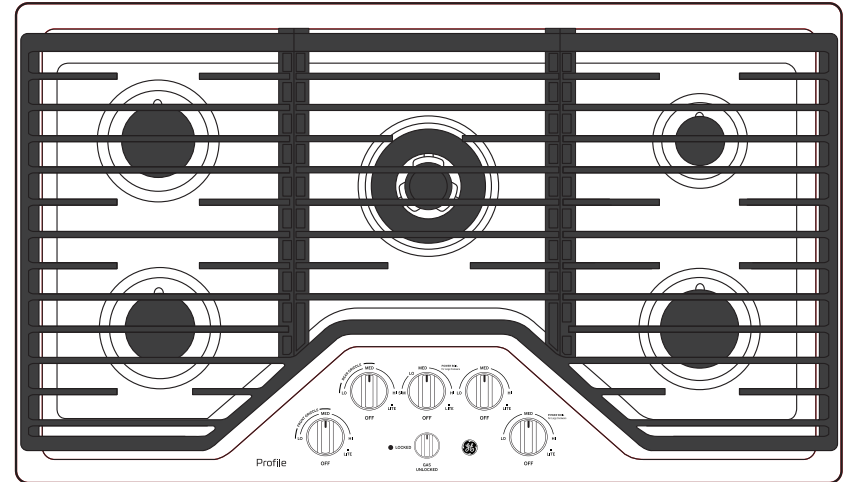

### GUARANTEED FIT

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications

Visit [geappliances.com](http://geappliances.com) for more info



# UVC9360SLSS

## Universal Custom Hood Insert

### DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


**Installation Information:** Before installing, consult installation instructions, packed with product, for current dimensional data.

**Accessories:**

UXCF91 - Charcoal Filter

UXN70 - Recirculation Kit

AMP RATING	
120V	3.0

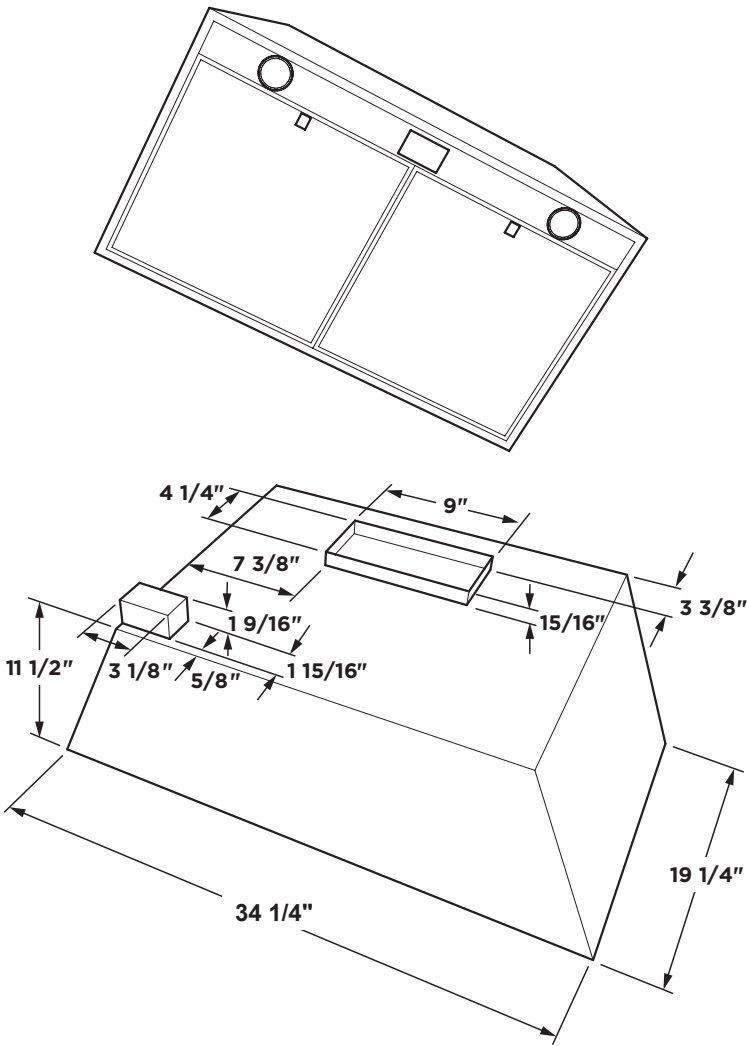

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.

# UVC9360SLSS

## Universal Custom Hood Insert

### FEATURES AND BENEFITS

Adjustable CFM blower – High-powered 610-CFM blower range hood, adjustable downward to either 370 or 290 maximum CFM to accommodate different installation needs

Triple LED dimmable lighting – bulbs included – LED modules ensure bright lighting for the entire cooking environment

Premium Baffle Stainless Steel Filters – remove odors and grease from your cooking area and easy to clean in your dishwasher

WiFi Connect – Control appliances with a smart device or just the sound of your voice


Electronic backlit controls – Add a sophisticated look with this up-front, easy-to-use display

Chef Connect – Automatically control the hood's lights and fan by syncing with the range

Remote control included – Activate and adjust your hood functions from anywhere in the kitchen

Four-speed fan control – Helps draw smoke, grease, odors and moisture out of the kitchen air

Model UVC9360SLSS – Stainless steel

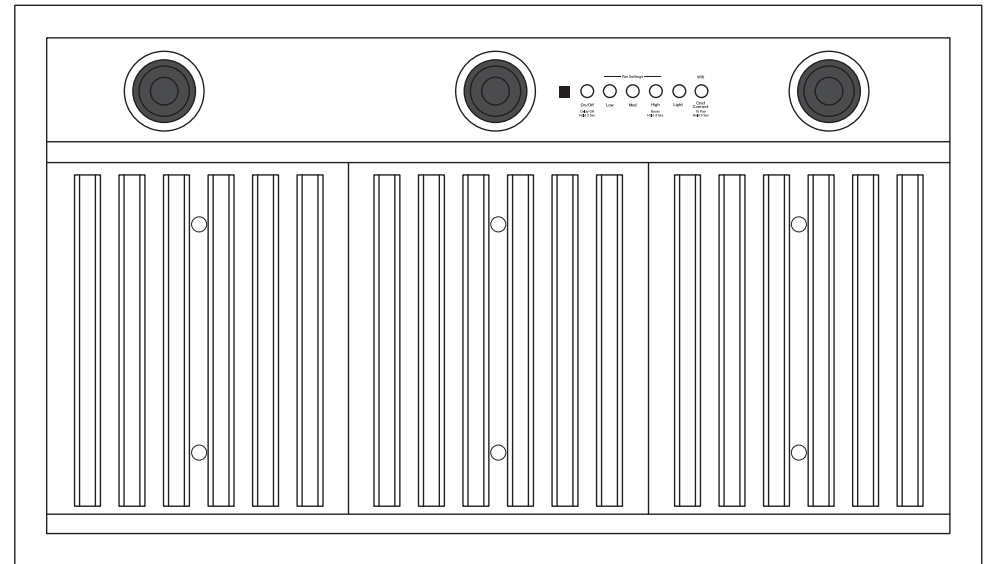


# GCST16S1W

GE 1.6 Cu. Ft. Countertop Microwave Oven

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

EXTERIOR DIMENSIONS* (IN INCHES)	
W x H x D	21 3/4 x 12 7/8 x 17 3/4

\*Height includes feet

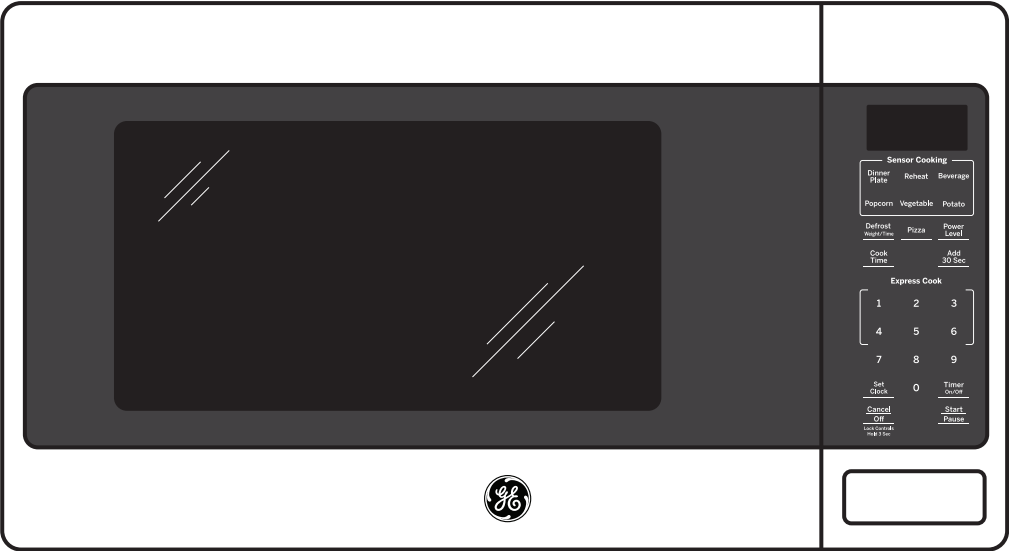

This unit designed to be placed on countertop.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



# GCST16S1W

## GE® 1.6 Cu. Ft. Countertop Microwave Oven

### FEATURES AND BENEFITS

1.6 cu. ft. capacity – 1150 Watts (IEC-705 test procedure)

Sensor cooking controls – Automatically adjusts time and power

Child Lock On/Off – Provides an added layer of peace of mind for modern households. (See product literature for instructions on how to turn Child Lock off)

Auto and time defrost – Defrosting times and power levels are programmed automatically or manually for optimal results

Turntable – Rotates food throughout the cycle

Instant on controls – One-touch instant operation

Control lockout – Helps prevent accidental activation

Cooking complete reminder – Know when your food is ready


Timer on/off – Minute timer helps keep you on track

Model GCST16S1WBB – Black

Model GCST16S1WWW – White

Model GCST16S1WSS – Stainless steel

Model GCST16S1WTS – Black stainless

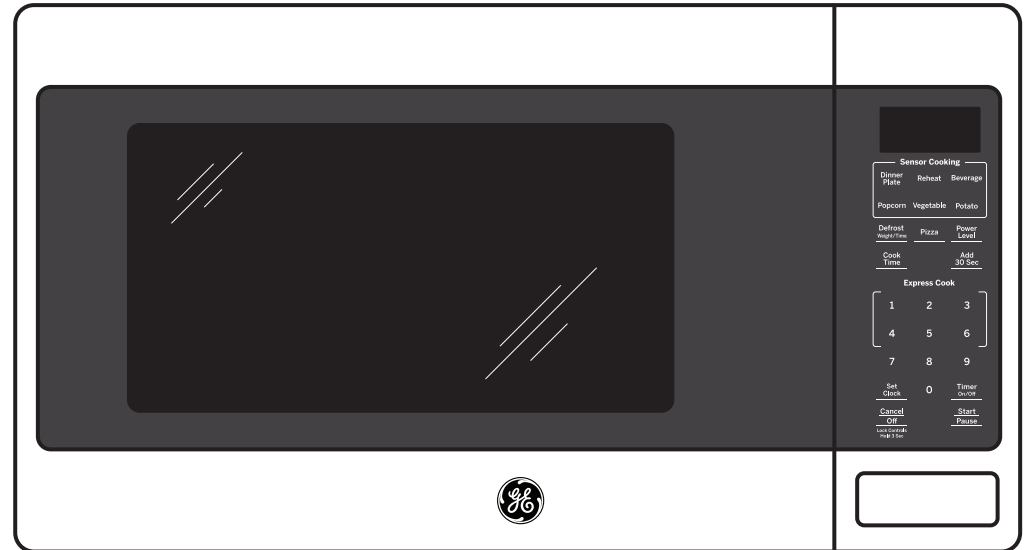

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



# GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

GE® 5.0 cu. ft. Capacity Front Load

ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

## DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

### ELECTRIC RATING


120V	11.0A, 60Hz
------	-------------

### INSTALLATION INFORMATION:


For complete information, see installation instructions packed with your washer.

### INCLUDED:

- Power cord - up to 66" length
- Drain hose - up to 60" length

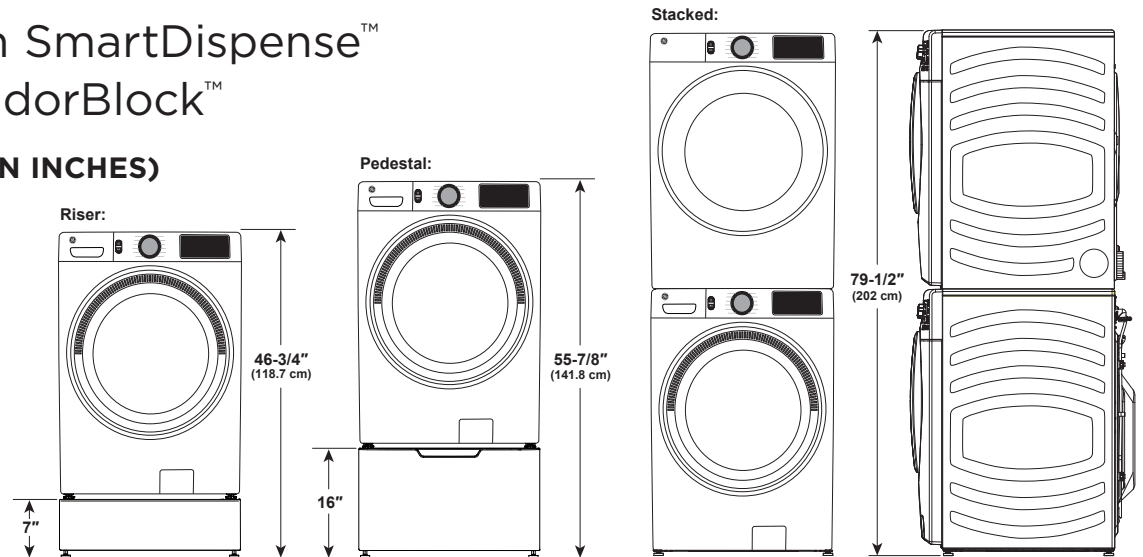

ADA Compliant

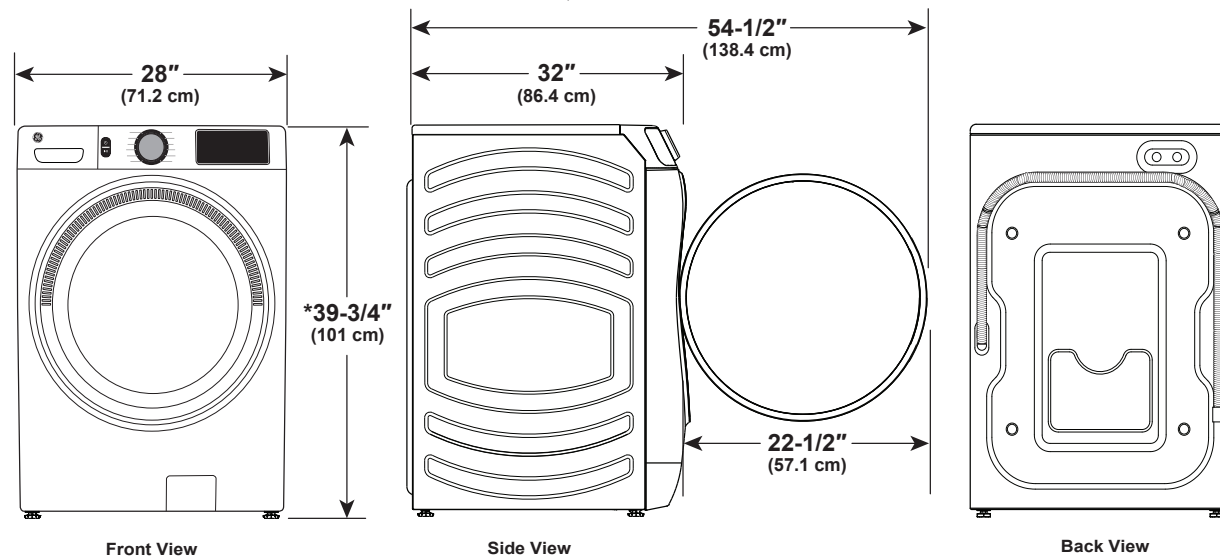

\*With leveling legs retracted:  
39-3/4" (101 cm).  
With leveling legs fully extended:  
40-5/8" (103.1 cm).



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

# GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

## SPECIAL INSTALLATION REQUIREMENTS:

### STACKED INSTALLATION:

-Brackets for stacking dryer over washer are not included with the washer. Order part no. GFA28KITN.

### ALCOVE OR CLOSET INSTALLATION:

-If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.

-The dryer MUST be exhausted to the outside.

-Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" all sides and top.\*

-Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

-No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

### BATHROOM OR BEDROOM INSTALLATION:

-The dryer MUST be exhausted to the outdoors.

-The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223.

### MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

-Minimum clearances to combustible surfaces 0" all sides and top.\*

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

\*For improved performance, a 1/2" clearance is suggested on each side.

\*\*Accessories sold separately.

## WEIGHT

-Carton weight 255.7 lbs.

-Product weight 246 lbs.

## ACCESSORIES\*\*

GE Part Number	Description
WR97X27706	Touch-up Paint (Carbon Graphite) .06 oz.
WB64X5025	Touch-up Paint (White) .06 oz.
WH49X316	Drain Hose Extension
PM7X2	Universal Low-Profile Floors Tray (White)
WX17X10001CA	Vibration Pads
WH41X10207	Fill Hose
GFP1528SNWW	Pedestal Accessory (White)
GFP1528PTDS	Pedestal Accessory (Carbon Graphite)
GFR0728SNWW	Riser (White)
GFR0728PTDS	Riser (Carbon Graphite)
GFA28KITN	Stacking Kit

## WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance Limited 10-year motor



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

# GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

GE® 5.0 cu. ft. Capacity Front Load ENERGY STAR® Steam Washer with SmartDispense™ and UltraFresh Vent System with OdorBlock™

## FEATURES AND BENEFITS

**UltraFresh Vent System with OdorBlock™** – The first and only UltraFresh Vent System with OdorBlock™ eliminates excess moisture to help prevent odors ensuring your washer stays fresh and clean.

**Microban® Antimicrobial Technology** – Built into components including the gasket, dispenser and draining system delivers protection that lives on load after load.

**SmartDispense™ Technology** – Save time and make laundry effortless with an intelligent dispenser that holds up to 32 loads of detergent and automatically dispenses the right amount each time.

**Built-in WiFi** – Start, stop and monitor your laundry from anywhere while receiving real-time notifications and updates.

**Dynamic Balancing Technology (dBT™)** – Our patented, time saving technology senses and re-balances uneven loads during the spin cycle, providing a quiet wash.

**Reversible Door** – Easily reverse your washer and dryer door for superior installation flexibility.

**Quick Wash Cycle** – Provides a fast 20 minute wash for lightly soiled items.

**Sanitize + Allergen** – Industry-first cycle sanitizes fabrics to kill 99% of common bacteria and allergens such as dust mites.

**Steam Cycles** – Safely penetrates deep into fabric fibers, loosening stains to deliver enhanced cleaning performance.

**Dryer Control™** – When units are stacked, turn on and control your dryer settings right from your washer's control panel, eliminating the need to reach the dryer's control panel.

**More Water Option** – For bulky items like a king-sized comforter or for heavily soiled loads, this option adds up to an additional 3 gallons of water for a deep water wash and rinse.

**Shallow Depth** – Never compromise on convenience with this 32" shallow depth washer that easily fits into tight spaces like an alcove or closet, making it a suitable solution for homes of any size.

**Time Saver** – When you need to get a full load of clothes clean in only 37 minutes.

**My Settings** – Store preferred dry cycle settings for later use, maximize time and alleviate adjusting cycle preferences with every load.

Model GFW655SSVWW – White

Model GFW655SPVDS – Carbon Graphite



For answers to your Monogram, GE Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

# GFD65ESSVWW / GFD65ESPVDS

GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

## DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)



ELECTRIC DRYER RATING	
120V/240V	5600W, 25A, 60Hz
120V/208V	4300W, 23A, 60Hz

**EXHAUST OPTIONS:** 4-way via rear, left, right, and bottom. (The right, left, and bottom venting options require Side Vent Kit: GFA28DSVN)

**CIRCUIT REQUIREMENTS:** An individual, properly grounded branch circuit, protected by a 30-amp circuit breaker or a time-delay fuse, is required.

**NOTE:** Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

**INSTALLATION INFORMATION:** For complete information, see installation instructions packed with your dryer.

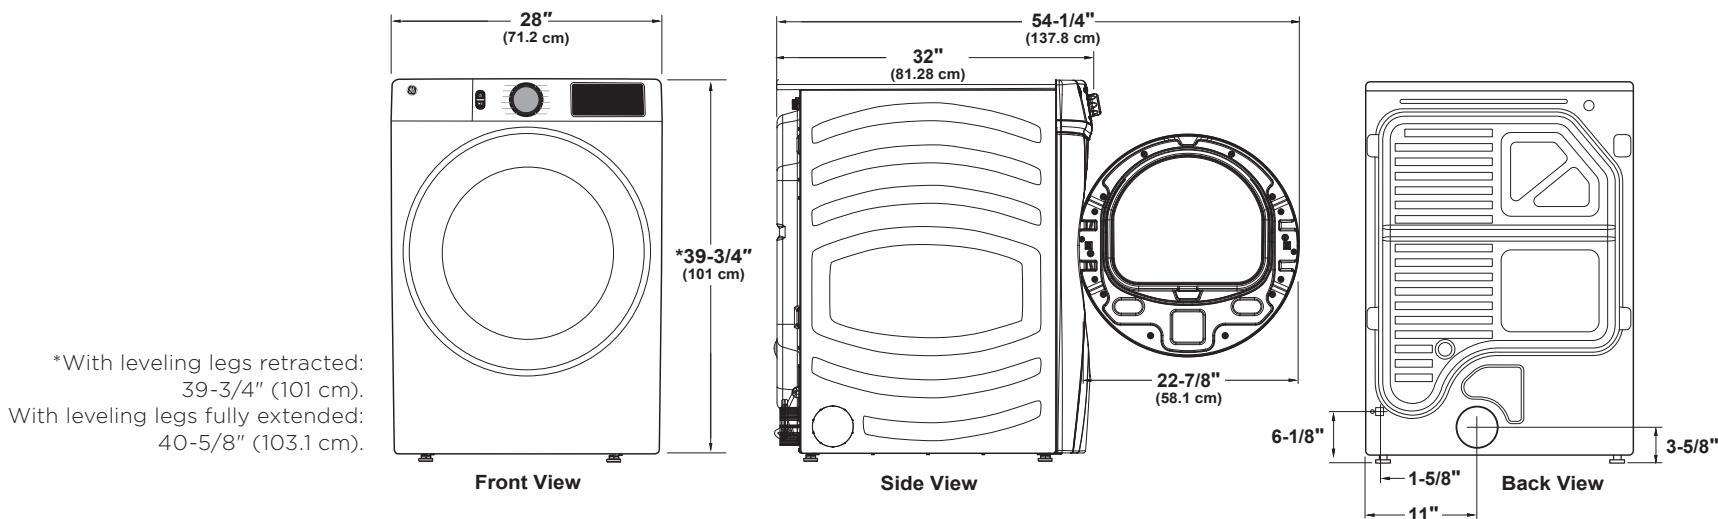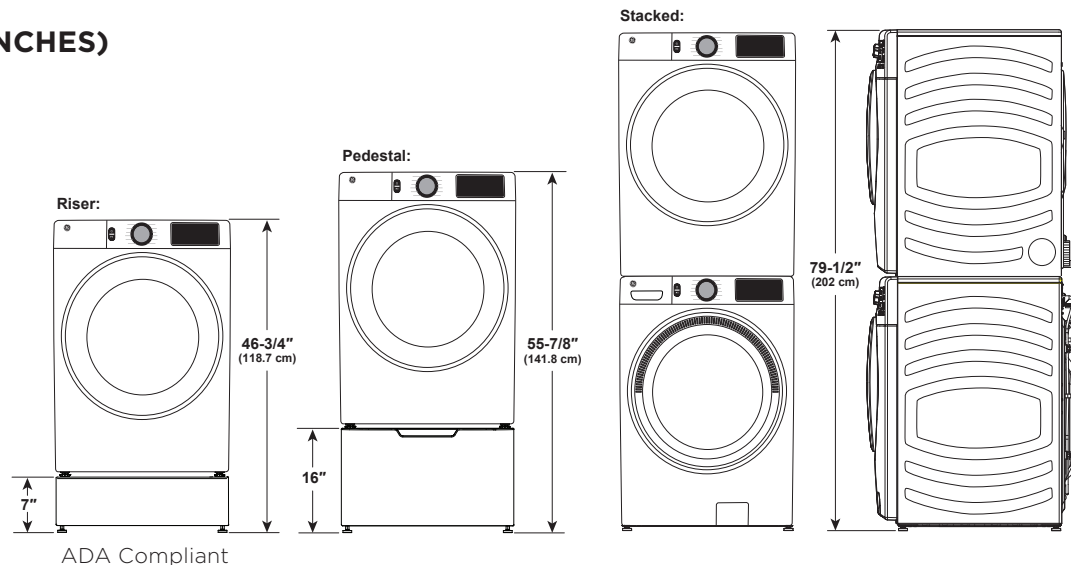

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

# GFD65ESSVWW / GFD65ESPVDS

## GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

### SPECIAL INSTALLATION REQUIREMENTS:

#### STACKED INSTALLATION:

Brackets for stacking dryer over washer are not included with the dryer. Order part no. GFA28KITN.

#### ALCOVE OR CLOSET INSTALLATION:

If your dryer is approved for installation in an alcove or closet, it will be label on the dryer back.

The dryer MUST be exhausted to the outside.

Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" all sides and top.\*

Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.

No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

#### BATHROOM OR BEDROOM INSTALLATION:

The dryer MUST be exhausted to the outdoors.

The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223 for gas dryers.

#### MINIMUM CLEARANCE OTHER THAN ALCOVE OR CLOSET INSTALLATIONS:

Minimum clearances to combustible surfaces 0" all sides and top.\*

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.

\*For improved performance, a 1/2" clearance is suggested on each side.

\*\*Accessories sold separately.

### WEIGHT

-Carton weight 142 lbs.

-Product weight 132 lbs.

### DRYER ACCESSORIES\*\*

GE Part Number	Description
WB64X5025	Touch-up Paint (White) .06 oz.
WR97X27706	Touch-Up Paint (Carbon Graphite) - 0.6 oz
WE02X29449	Dryer Rack Assembly
GFA28DSVN	Side Vent Kit
WH41X10207	Inlet Hose
WX17X10001CA	Vibration Pads
GFP1528SNWW	Pedestal Assembly (White)
GFP1528PTDS	Pedestal Assembly (Carbon Graphite)
GFR0728SNWW	Riser (White)
GFR0728PTDS	Riser (Carbon Graphite)
GFA28KITN	Stacking Kit

### WARRANTY

Labor Warranty	Limited 1-year entire appliance
Parts Warranty	Limited 1-year entire appliance Limited 10-year motor



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

# GFD65ESSVWW / GFD65ESPVDS

## GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

### DRYER EXHAUSTING INFORMATION -METAL DUCT ONLY

For complete information, see installation instructions packed with your dryer.

**DUCTING MATERIALS:** For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semi-rigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used **ONLY** in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

### EXHAUST LENGTH CALCULATION:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.

A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow.


A turn over 45° should be treated as a 90° elbow.

Dryers must be exhausted to the outside.


**CAUTION:** For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.

FOR MORE INFORMATION ON VENTING KITS AND ACCESSORIES, PLEASE CALL 1-800-GE-CARES.



Best performance			
Maximum length of 4" dia. <b>rigid metal</b> duct			
Exhaust hood type			
Domestic dryer models	Number of 90° turns	A 4" opening	B 2-1/2" opening
	0	90 ft.	60 ft.
	1	60 ft.	45 ft.
	2	45 ft.	35 ft.
	3	35 ft.	25 ft.
	4	25 ft.	15 ft.

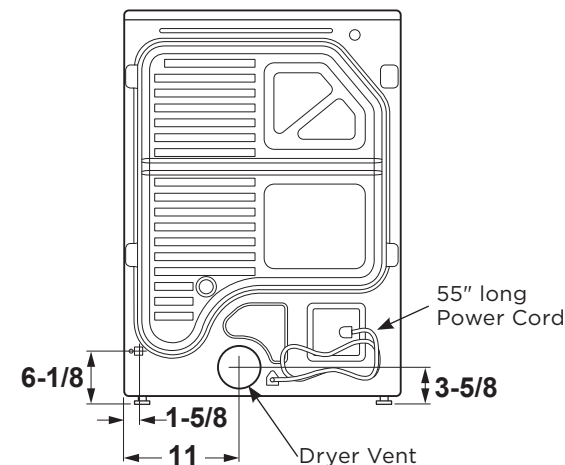

For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23



# GFD65ESSVWW / GFD65ESPVDS

## GE® 7.8 cu. ft. Capacity Front Load Electric Dryer with Steam

### FEATURES AND BENEFITS

**Powersteam** – Refresh small loads and dewrinkle larger loads with the power of steam.

**Built-in WiFi** – Start, stop and monitor your laundry from anywhere while receiving real-time notifications and updates.

**Quick Dry** – Quickly dries items and small loads for families on the go.

**Reduce Static** – Prevents static cling with a gentle mist near the end of the cycle.

**Sanitize Cycle** – Sterilize clothing with elevated temperatures designed to kill common household bacteria.

**Wrinkle Care** – Prevents wrinkles by extending the tumble without heat.

**Damp Alert** – Signals when delicate clothes reach the ideal dampness level for ironing or final air drying.

**Vent Sensor** – Provides alerts when a restriction is detected in your dryer vent.

**4 Way Venting** – Easy-to-change venting options provide the ultimate installation flexibility to fit in your home.

**Shallow Depth** – Never compromise on convenience with this 32" shallow depth unit that easily fits into tight spaces like an alcove or closet, making it a suitable solution for homes of any size.

**Reversible Door** – Easily reverse your washer and dryer door for superior installation flexibility.

**My Settings** – Store preferred dry cycle settings for later use, maximize time and alleviate adjusting cycle preferences with every load.

Model GFD65ESSVWW – White

Model GFD65ESPVDS – Carbon Graphite



4-way Venting Option



For answers to your Monogram, Café™, GE Profile™ or GE Appliances product questions, visit our website at [geappliances.com](http://geappliances.com) or call GE Answer Center® Service, 800.626.2000.



Specification Revised 6/23

# 24" Pocket Handle Dishwasher

800 Series – Stainless Steel SHP78CM5N



**BOSCH**  
Invented for life



**SHP78CM5N**  
Stainless Steel

Also available in:

White SHP78CM2N  
Black SHP78CM6N  
Black SHP78CM4N  
Stainless

**PowerControl™ spray arm targets your dirtiest dishes with a deeper clean, no matter where you load them on the bottom rack.**

## Features & Benefits

Patented CrystalDry™ technology transforms moisture into heat to get dishes, including plastics, 60% drier.\*

The Flexible 3rd Rack with fold down sides adds 30% more\* loading area, perfect for utensils and ramekins.

Enhance your cleaning experience with Wi-Fi enabled Home Connect®. Access additional wash cycles and options or choose the right one for your needs using Smart Cycle.

So quiet at 42 dBA, the InfoLight® bar shines below the handle so you know the dishwasher is running.

## General Properties

Number of wash cycles	5 + 3 additional in Home Connect®
Number of options	4 + 2 additional in Home Connect®
dBA	42
Wash system	PrecisionWash® with PowerControl™
Drying system	CrystalDry™
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	Touch Controls
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Home Connect® (WiFi enabled)	Yes
NSF®-certified** sanitize option	Yes
Water softener	No
Five-level wash	Yes
Child Lock button suspension	No
Anti-Fingerprint Finish	Yes
Special features	CrystalDry™ Option, InfoLight®

## Efficiency

Water usage per cycle	3.2 gal
ENERGY STAR® certified	Yes
Total annual energy consumption	240 kWh

## Capacity

Number of place settings	16
--------------------------	----



\* Based on aggregate average drying performance of Bosch Dishwashers with CrystalDry™ on combined household load including plastics, glass, steel, and porcelain as compared to Bosch Dishwashers with PureDry®. Drying performance may vary by dish type.

\*\*Compared to a Bosch dishwasher with 2 racks.

\*\*Certification to NSF/ANSI Standard 184 for residential dishwashers.

## Technical Details

Watts	1440 W
Current	12 Amps
Volts	120 V
Frequency	60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door	Left – 45" Right – 56"
Minimum water pressure	14 lb/sin
Length outlet hose	78 3/4"

## Dimensions & Weight

Overall appliance dimensions (HxWxD)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD)	33 7/8" x 24" x 24"
Adjustable feet	Yes
Net weight	96 lbs

## Accessories—Optional

Junction Box	SMZPCJB1UC
Junction Box + Supply Hose Kit	SMZ3IN1UC
Supply Hose Kit with Elbow	SMZSH1ABUC
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Flexible Silverware Basket	SMZ4000UC
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector + Power Cord Clip Install Kit	SMZEPCC1UC

**Accessories:** To purchase Bosch accessories, cleaners & parts please visit [www.bosch-home.com/us/store](http://www.bosch-home.com/us/store) or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

**Notes:** All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

**Warranties:** Please see Use & Care manual or Bosch website for statement of limited warranty.

**For more information on our entire line of products, go to [www.bosch-home.com/us](http://www.bosch-home.com/us) or call 1-800-944-2904**

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.



# 24" Pocket Handle Dishwasher






800 Series – Stainless Steel SHP78CM5N



**BOSCH**

Invented for life

## Installation Details

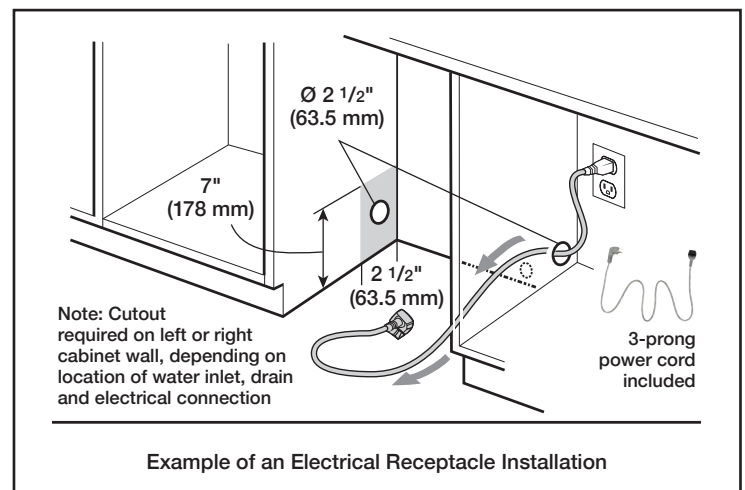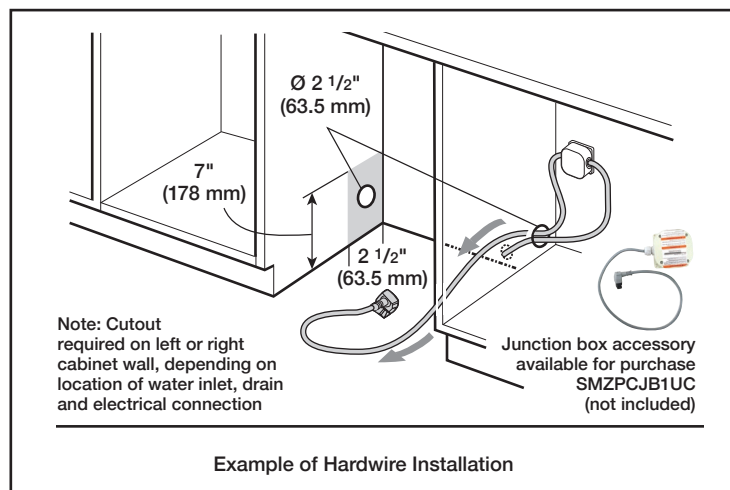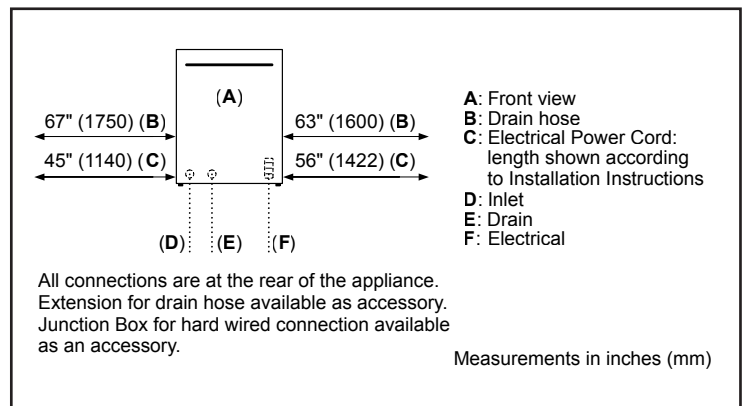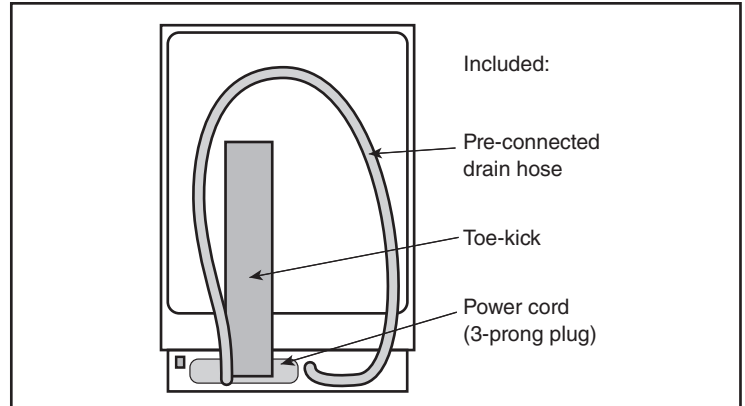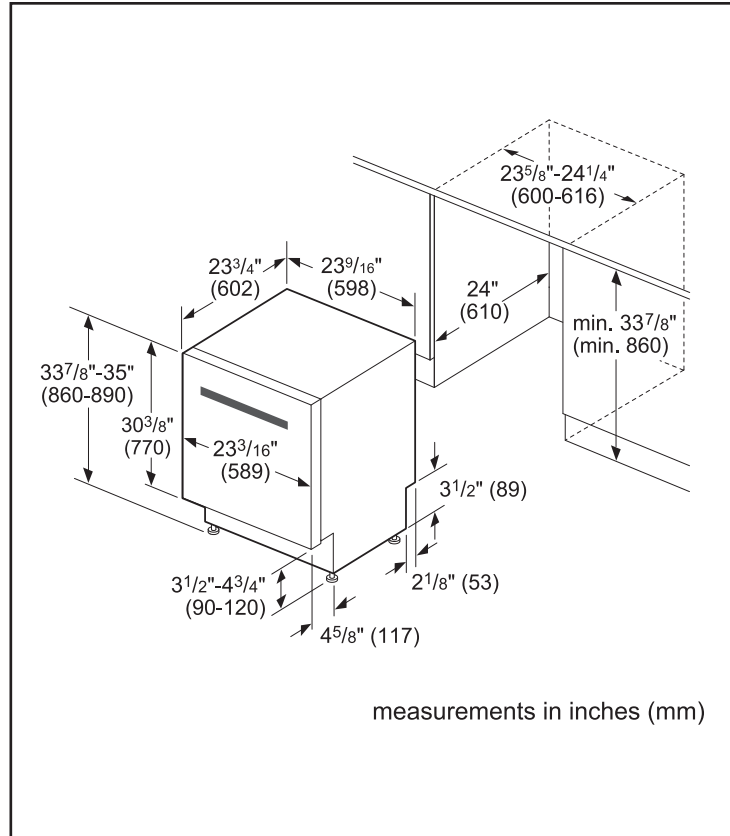

**Accessories:** To purchase Bosch accessories, cleaners & parts please visit [www.bosch-home.com/us/store](http://www.bosch-home.com/us/store) or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

**Notes:** All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

**Warranties:** Please see Use & Care manual or Bosch website for statement of limited warranty.

**For more information on our entire line of products, go to [www.bosch-home.com/us](http://www.bosch-home.com/us) or call 1-800-944-2904**

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.



# 24" Pocket Handle Dishwasher

800 Series – Stainless Steel SHP78CM5N



**BOSCH**  
Invented for life

## Installation Details

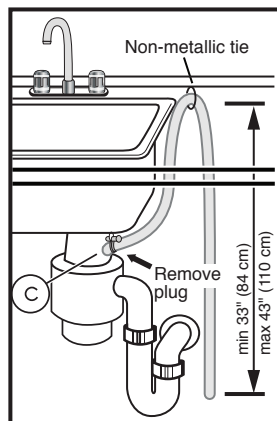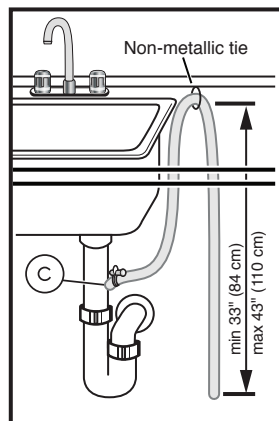

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

**Accessories:** To purchase Bosch accessories, cleaners & parts please visit [www.bosch-home.com/us/store](http://www.bosch-home.com/us/store) or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

**Notes:** All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

**Warranties:** Please see Use & Care manual or Bosch website for statement of limited warranty.

**For more information on our entire line of products, go to [www.bosch-home.com/us](http://www.bosch-home.com/us) or call 1-800-944-2904**

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.